

CAMBRIDGE S3

AC068D

CE UNI EN ISO 20345:2012 S3 SRC

High shoe, WRU back leather thickness 1,8-2,0 mm.
Perspiring and abrasion resistant fabric lining.
Shoe with refracting fabric insert.
Soft, lined and padded tongue.

TOECAP 200J polymeric **composite non-thermic** according to EN 12568

MIDSOLE flexible antiperforation composite fabric according to EN 12568

SOLE ACTION bidensity polyurethane antistatic, resistant to hydrolysis ISO 5423:92, to hydrocarbons and to abrasion, anti-shock and anti-slipping **SRC**

INSOLE 4000, removable, anatomic, absorbing, antistatic and perspiring.

Size 36-51 **Shoe weight** Tg 42 gr. **615**




CERTIFICATIONS



TECHNOLOGIES AND MATERIALS



SECTORS

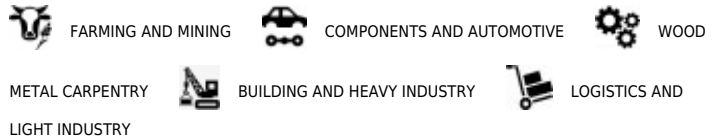

SOLE



Action is a shoe studied for external jobs, with soft lines making it very light and comfortable.

PLUS

ANTISLIPPING TEST RESULTS

ANTISLIPPING TEST RESULTS		
SRC ANTI-SLIPPING SOLE		
SRA ceramic + NaLS	HEEL >= 0,28	0,39
	FLAT >= 0,32	0,36
SRB steel + glycerol	HEEL >= 0,13	0,26
	FLAT >= 0,18	0,22