

# KENT S3

AC061D

CE UNI EN ISO 20345:2012 S3 SRC

Low shoe, WRU back leather thickness 1,8-2,0 mm.  
Perspiring and abrasion resistant fabric lining.  
Shoe with refracting fabric insert.  
Soft, lined and padded tongue.

**TOECAP 200J** polymeric **composite non-thermic** according to EN 12568

**MIDSOLE flexible antiperforation composite fabric** according to EN 12568

**SOLE ACTION** bidensity polyurethane antistatic, resistant to hydrolysis ISO 5423:92, to hydrocarbons and to abrasion, anti-shock and anti-slipping **SRC**

**INSOLE 4000**, removable, anatomic, absorbing, antistatic and perspiring.

**Size 36-51 Shoe weight Tg 42 gr. 595**




## CERTIFICATIONS



## TECHNOLOGIES AND MATERIALS



## SECTORS

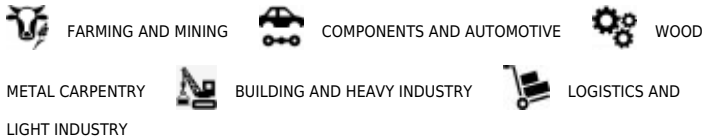

## SOLE



Action is a shoe studied for external jobs, with soft lines making it very light and comfortable.

## PLUS

## ANTISLIPPING TEST RESULTS

| ANTISLIPPING TEST RESULTS         |                     |             |
|-----------------------------------|---------------------|-------------|
| <b>SRC</b><br>ANTI-SLIPPING SOLE  |                     |             |
| <b>SRA</b><br>ceramic +<br>NaLS   | <b>HEEL</b> >= 0,28 | <b>0,39</b> |
|                                   | <b>FLAT</b> >= 0,32 | <b>0,36</b> |
| <b>SRB</b><br>steel +<br>glycerol | <b>HEEL</b> >= 0,13 | <b>0,26</b> |
|                                   | <b>FLAT</b> >= 0,18 | <b>0,22</b> |