

VERDI S3 R

AC880BRP

CE UNI EN ISO 20345:2012 S3 SRC

High shoe, water-resistant WRU leather thickness 1,8-2,0 mm. Perspiring and abrasion resistant fabric lining. Shoe with refracting fabric insert. Lined and padded tongue. Shoe with fast device.

TOECAP 200J polymeric **composite non-thermic** according to EN 12568

MIDSOLE antiperforation steel according to EN 12568

SOLE ACTION bidensity polyurethane antistatic, resistant to hydrolysis ISO 5423:92, to hydrocarbons and to abrasion, anti-shock and anti-slipping **SRC**

INSOLE 1000, in high density and open cells latex foam.

Absorbing, antistatic and perspiring

Size 39-47 Shoe weight Sz 42 gr. 560




CERTIFICATIONS



TECHNOLOGIES AND MATERIALS



SECTORS

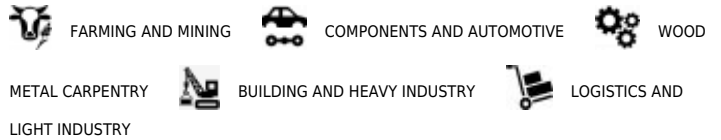

SOLE



Action is a shoe studied for external jobs, with soft lines making it very light and comfortable.

PLUS

ANTISLIPPING TEST RESULTS

ANTISLIPPING TEST RESULTS			
SRC			
ANTI-SLIPPING SOLE			
SRA ceramic + NaLS	HEEL >= 0,28	0,39	
	FLAT >= 0,32	0,36	
SRB steel + glycerol	HEEL >= 0,13	0,26	
	FLAT >= 0,18	0,22	