

# VILNIUS S3

KU0250

CE UNI EN ISO 20345:2012 S3 SRC ESD CLASS 3

Low shoe, MICROWASH thickness 1,8 - 2,0 mm.

Perspiring and abrasion resistant fabric lining.

Shoe with refracting fabric insert.

Soft, lined and padded tongue.

**COMPLETELY METAL FREE SHOE**

**TOECAP 200J** polymeric **composite non-thermic** according to EN 12568

**MIDSOLE flexible antiperforation composite fabric** according to EN 12568

**SOLE KUBE** bidensity polyurethane antistatic, resistant to hydrolysis ISO 5423:92, to hydrocarbons and to abrasion, anti-shock and anti-slipping **SRC**

**INSOLE 5000, three-materials extracomfort:** perspiring, removable, anatomic, absorbing, ESD and anti-bacterial

The shoe satisfies the requirement according to the norm IEC 61340-4-3:2001 for the electrical resistance **ESD class 3 (electric dissipative footwear)**

**Size 36-47 Shoe weight Sz 42 gr. 483**




## CERTIFICATIONS



## TECHNOLOGIES AND MATERIALS



## SECTORS

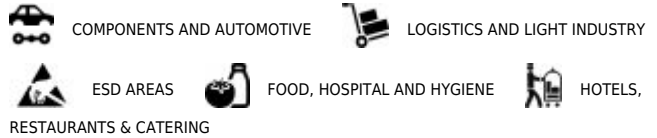

## SOLE



In order to avoid the high number of accidents caused by slipping danger, Giasco realized an excellent anti-slipping product. This sole is called Kube, a young and sporty styled shoe equipped with a special gripping compound and specific cubic dowels with inverted profile in the outsole. With thanks to these special characteristics Kube obtained the maximum certification against slipping: jobs on inclined roofs (UNI 11583:2015).


## PLUS



### MICROWASH

MICRO WASH is a Chrome free material finished with perspiring polyurethanes. Very light and perspiring, it is suitable for alimentary et hospital sectors. It is also studied for people wearing the shoes for a lot of hours on wet surfaces. It resists to acids, mostly oleic acid. It is washable with water and neutral soap at 40°.

## ANTISLIPPING TEST RESULTS

ANTISLIPPING TEST RESULTS		
	<b>SRC</b>	
ANTI-SLIPPING SOLE		
<b>SRA</b> ceramic + NaLS	<b>HEEL</b> >= 0,28	<b>0,46</b>
	<b>FLAT</b> >= 0,32	<b>0,43</b>
<b>SRB</b> steel + glycerol	<b>HEEL</b> >= 0,13	<b>0,30</b>
	<b>FLAT</b> >= 0,18	<b>0,29</b>